

BB-4[®]

SERIES

BB-4-23V VEHICLE MOUNT VERTICAL DRIVE



HIGH PRESSURE 4-STAGE FIRE PUMP

The **WATERAX** BB-4-23 pump pairs a reliable high performance 4-stage pump end with a powerful Briggs & Stratton 4-stroke 23 HP engine to achieve pressures of up to 440 PSI (30.3 BAR) and flow rates reaching 106 GPM (401 L/Min). Strong enough to operate as a source pump for tandem and parallel pumping, it is also optimal for direct attack firefighting, remote watering, sprinkler systems, and is a popular choice for slip-on units.

The **WATERAX** quick release clamp provided on the BB-4[®] pump lets you replace a damaged pump end in the field with minimal equipment downtime. The 4-stage pump end on the BB-4[®] is identical to the pump end on the MARK-3[®] unit, which greatly reduces your spare parts inventory and improves your ability to respond to unforeseen equipment damage. You can also quickly install a mid-range B2X™ pump end as needed for supply or structure firefighting.


Applications

- Slip-on units
- Attack line firefighting
- Long hose lay for remote watering during firefighting operations
- High elevation firefighting in mountainous areas
- Accuracy in flow trajectory when structure firefighting
- Tandem pumping over long distances
- Parallel pumping for higher volumes

Features and Benefits

- Quick release clamp and swappable pump ends for minimal equipment downtime and inventory
- Sealed bearing to eliminate pump end greasing in the field
- Belt drive system for reliable, low maintenance performance
- Aluminium alloy pump components and anodized parts for lighter weight and greater resistance to corrosion
- Comprehensive user and service manuals
- EPA Certified

SPECIFICATIONS

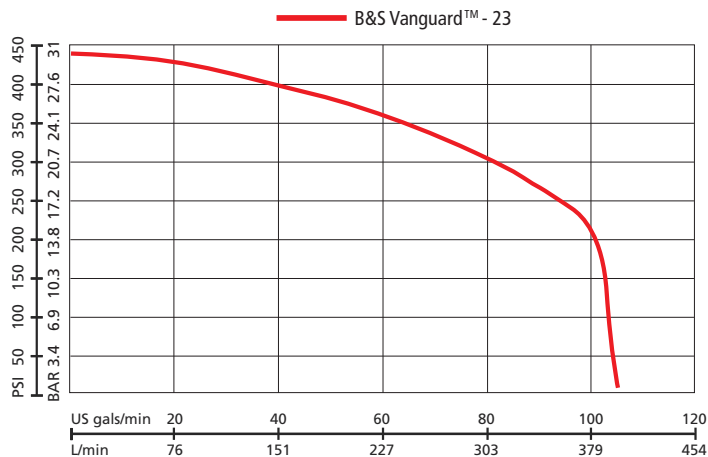

Flow rate at specified pressure

Maximum Pressure: 440 PSI (30.3 bar)
 Free flow: 106 US gals/min (401 L/min)
 Maximum Head: 1016' (310 m)

Flow Rate			Pressure	
US GPM	(LPM)	@	PSI	(BAR)
105	(397)	@	150	(10.3)
95	(360)	@	250	(17.2)
65	(246)	@	350	(24.1)

Engine: Briggs & Stratton® Vanguard™ - 23 hp



Pump Specifications:

Type: Detachable 4 stage Centrifugal
 Ratings: ISO 9 and NFPA 1906 Medium Pressure Rating of 50 GPM
 Description: High Pressure, Medium Flow, Foam Compatible
 Maximum Allowable Pressure: 600 PSI (41.4 bar)
 Intake: 2" Male NPSH Thread
 Discharge: 1-1/2" Male NPSH Thread
 Priming Port: 1-1/2" Male NPSH Thread
 Body & Diffusers: Anodized corrosive resistant aluminum
 Impellers: 3.67" Diameter; Anodized corrosive resistant aluminum
 Pump Shaft: Stainless Steel
 Bearings: Maintenance Free; sealed ball bearing
 Pump Seal: Heat resistant, Maintenance Free
 Clamp: Hand tight quick release clamp (no tools needed)
 Drive Unit: Timing Belt and Pulley; Speed Inserter
 Speed Inserter Position: Horizontal
 Drive Ratio: 1.88: 1
 Color: Red
 Special Feature: The entire pump separates completely from the engine/speed inserter.

Engine Specifications:

Model & Type: Briggs and Stratton Vanguard 4-cycle, horizontal shaft, twin cylinder, OHV
 Maximum Power: 23 HP (17.2 kW) @ 3600 RPM
 Maximum Torque: 32.75 lb-ft (44.4 Nm) @ 2600 RPM
 Bore & Stroke: 2.97 x 2.76 inches (72 x 70 mm)
 Displacement: 38.26 cubic inches (627 cc)
 Starting System: 12 VDC electric start with recoil start
 Ignition: Magnatron
 Charging: 16 AMP regulating alternator
 Wiring: Pre-wired for FastWire panel connections (panels purchased separately).
 Governor: Mechanical
 Cooling: Air Cooled
 Lubrication: Oil, Full pressure
 Oil Capacity: 1.8 quarts (1.7 liters)
 Fuel Pump: 18 inch lift.
 Emissions: Meets current CARB, EPA, and CE requirements.
 Fuel Type: Gasoline [unleaded, 86 minimum octane, 10% maximum ethanol]
 Fuel Consumption: 2.1 US gals/hr (7.9 liters/hr)
 Muffler: Forestry approved spark arrestor

All features are not available on every model. Please refer to the product selection matrix to select the proper model.

SPECIFICATIONS

Primer Specifications:

Hand Primer Option:

	Guzzler, Diaphragm Type; Reliable, Lightweight and Rugged
Intake and Discharge Port Size:	½" Female NPT
Construction:	Aluminum Handle, composite body, buna-n reinforced diaphragm and flapper valves
Lift:	12 feet (3.7 m) [up to approximately 16 feet (4.8 m) with suction hose footvalve]
Head Capacity:	30 ft (9.1 m)
Maximum Pressure:	15 PSI (1.03 bar)
Maximum Service Temp:	150° F (66° C)
Volume per Stroke:	0.44 quart (0.42 liter)
Dimensions (L x W x H):	12-3/4" x 4-1/2" x 4-5/16" (324 x 114 x 110 mm)
Weight:	1.70 lbs (0.77 kg)

Shipped loose with connection hardware and 6 feet of hose

Exhaust Primer Option:

	Venturi Type (when selected mounted to exhaust primer muffler)
Venturi Construction:	Brass
Exhaust Valve Construction:	Aluminum with stainless shaft and disc
Operation:	Remote mount push/pull cable.
Vacuum:	Minimum of 17 in-Hg

Electric Primer Option:

	12 VDC Piston Type Vacuum Pump
Intake and Discharge Port Size:	3/8" Female NPT
Construction:	Corrosion Resistant Aluminum with Bronze Sleeve and Composite Piston
Max. Current Draw:	105 amps
Lift:	25 feet (7.6 m)
Vacuum:	22 in-Hg
Dimensions:	9" x 4-1/8" x 7-1/2" (229 x 105 x 191 mm)
Weight:	8.1 lbs (3.7 kg)
Vehicle Units:	Shipped loose with mounting plate, hardware, and 6 feet of hose

Frame Specifications:

Vehicle Mount:	Black flat base with tubular horizontal legs. (Provided with industrial grade stud isolators - shipped loose)
----------------	---

Controls Specifications:

Engine supplied controls:	Choke & Throttle levers.
Remote exhaust:	Pull cable
FastWire quick connect:	Loomed engine wire harness (pre-wired to engine) with 8 pin Molex MX150L Industrial Sealed Male Connector. All Vehicle Mounted BB-4 pumps are equipped with FastWire quick connect engine wire harness for plug & play ease in connecting pump engine, power, and control components such as the WATERAX Control Panels MCP, PMSCP, WCP* Series.
WATERAX Control Panels:	MCP, PMSCP, WCP* Series * Water and/or foam level monitors, electric primer, work light options available.

Note: Refer to the WATERAX Control Panel data sheet and specifications to select a remote mount panel and/or call your WATERAX dealer to customize your own control panel with water and/or foam level monitors, and toggle switches for optional electric primer and work light.

PRODUCT SELECTION

PRODUCT SELECTION MATRIX

		BB-4-23V	BB-4-23VX
STANDARD INCLUSIONS	Primer	Guzzler Hand Primer	-
		Remote Exhaust Primer w/Control Cable PART-763	-
		Exhaust Primer	S
		Electric Package - Electric Primer, LED work light, & Battery	-
	Muffler	B&S horizontal low tone	-
		Dual B&S low tone	S
		Exhaust primer muffler	-
	Fuel Tank	Integral / 7 US qts (6.6 L)	-
		Integral / 4 US qts (3.8 L) w/ 3-way valve	-
	Controls	Engine Mount Control Panel	-
Discharge Gauge	0-600 psi, 2-1/2" dial	-	
Check Valve Manifold	1-1/2" NPSH	-	
FastWire CTRL Cable	B&S 3' CTRL Cable with 8 pin connector (FWC-B-3)	0	
Weight		153 lbs (69 kg)	153 lbs (69 kg)

OPTIONS & ACCESSORIES

Sold Separately

Controls



VCBLKIT
Vernier Throttle Cable



PMSCP
Panel Mount Standard Control Panel
w/ FastWire CTRL connector.



MCP
Mini Control Panel
w/ FastWire CTRL connector.



WCP
WATERAX Control Panel
w/ FastWire PWR & CTRL connectors.

Primer	Electric Kit	FastWire Cables
--------	--------------	-----------------



GZPRIMERKIT
Guzzler Hand Primer
with hose & valve



BATKIT-66
Deep Cycle Battery Kit
w/ FWP-9 cable



FWC-B-3
3' B&S CTRL Cable
w/ lugs & 8 pin conn.



FWP-20
20' PWR Cable with lugs
& Anderson conn.



EPRIMERKIT
Electric Primer w/ plate,
5' harness & switch



WLIGHTKIT
LED Work Light w/ 5'
harness & toggle switch

FWX-3
3' CTRL Cable Extension
w/ two 8 pin connectors

FWP-9
9' PWR Cable w/ lugs
& Anderson conn.

FWP-3
3' PWR Cable w/ lugs
& Anderson conn.

Fuel Tank	Pump Intake & Discharge Adapters
-----------	----------------------------------



FA-452
Remote Fuel Tank
6.6 US Gallons w/ quick conn.

FA-452-3
Remote Fuel Tank
3.2 US Gallons w/ quick conn.

12-401B-NS-TRPD
Fuel Line EPA -
quick conn. to hose 1/4"

12-401B-NS-TRPD
Fuel Line -
quick conn. to SAE 45 Flare



- ADP-A-FM20S** Adapter 2" NPSH Female to NPSH Male
- ADP-A-FM20SP** Adapter 2" NPSH Female to NPT Male
- ADP-A-FM20SV** Adapter 2" NPSH Female to Victaulic
- ADP-A-FM15SN** Adapter 1-1/2" NPSH Female to NH Male
- ADP-A-FM15S** Adapter 1-1/2" NPSH Female to NPSH Male
- ADP-A-FM15SP** Adapter 1-1/2" NPSH Female to NPT Male
- ADP-A-FM15SV** Adapter 1-1/2" NPSH Female to Victaulic






B-6365 Check valve manifold 1-1/2" NPSH

TECHNICAL DRAWINGS

BB-4-23V

Length 30.25" (76.8 cm) Width 20" (50.8 cm)




Height 20.25" (51.43 cm) Weight 154 lbs (70 kg)



BB-4-23VX

Length 30.25" (76.8 cm) Width 18.75" (47.62 cm)

Height 20.75" (52.70 cm) Weight 162 lbs (73 kg)

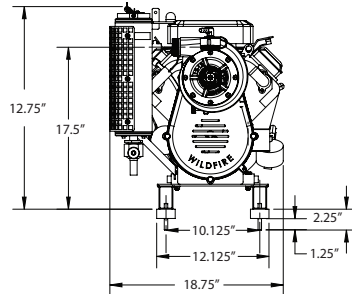



WATERAX Inc.
6635 Henri-Bourassa W.
Montreal, QC H4R 1E1

TF 855-616-1818

T 514-637-1818

F 514-637-3985

info@waterax.com
www.waterax.com

Distributed by:

All information contained in this document including drawings is proprietary to *WATERAX* and may not be copied, reproduced or used in whole or in part without our prior written permission. The information in this document is subject to change without notice. Model displayed with multiple options. Weight and dimensions are approximated and may vary depending on options.