
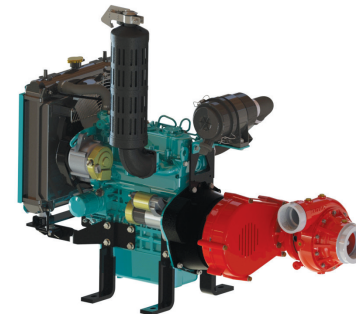


PRODUCT SELECTION MATRIX

B2X™

DIESEL 25 HP



		B2X DIESEL Vehicle Mount Vertical Drive		B2X DIESEL Vehicle Mount Horizontal Drive	
		B2X-D902V		B2X-D902H	
SPECIFICATIONS	Performance (standard NFPA Conditions)	Flow @ 50 PSI (3.4 BAR)			274 GPM (1037 lpm)
		Flow @ 100 PSI (6.9 BAR)			220 GPM (833 lpm)
		Flow @ 150 PSI (10.3 BAR)			112 GPM (424 lpm)
		Maximum Pressure			180 PSI (12.4 bar)
		Maximum Flow			310 GPM (1173 lpm)
	Pump Type	Mid-Range			Detachable 2-Stage Centrifugal Pump
	Pump Standard Connections	Intake			3" Female NPT / 4" VIC Combination
		Discharge			2-1/2" Female NPT / 3" VIC Combination
	Engine Type	Fuel Injected Liquid Cooled Diesel			Kubota D902-E4B 3-Cylinder
	Engine Max Power				24.8 HP (18.5 kW) @ 3600 RPM [40.6 lb-ft (55 Nm) @ 2600 RPM]
Frame				4 Leg Mounts	
Drive	Orientation (timing belt, 1.88:1 speed increasing ratio)	Vertical			Horizontal
Dimensions	L x W x H	39.8" x 20.6" x 37"		39.8" x 22.7" x 37"	
Dry Weight*		280 lbs (127 kg)		280 lbs (127 kg)	

* Approximated and varies based off option selections

OPTIONS			
		0	0
Primer	Guzzler Hand Primer	0	0
	Electric Primer	0	0
Muffler	Rain Cap	S	S
	Forestry Approved Spark Arrestor	0	0
Controls	PMSCP-DIESEL	0	0
	LOFA	0	0
Fastwire	FWX-D902-3 3' Extension Harness	0	0

Standard s
 Option o
 Not Applicable —