


PRODUCT SELECTION MATRIX

RANCHER® SERIES

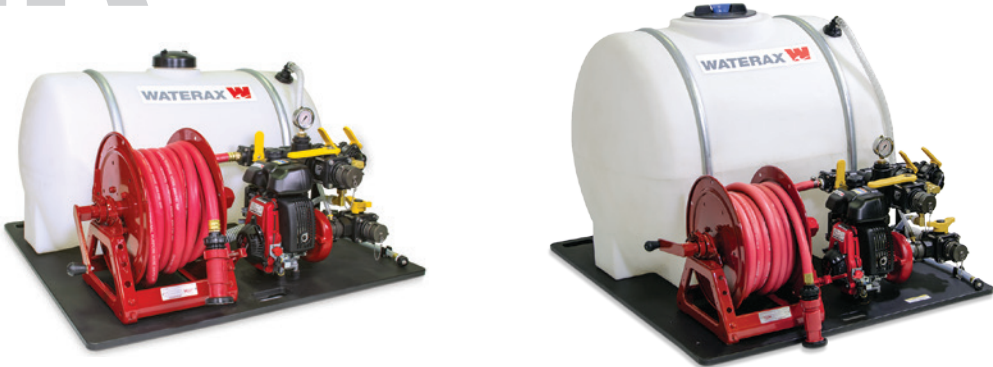

		RANCHER-65				RANCHER-125			
		RNCH65N	RNCH65S	RNCH65NF	RNCH65SF	RNCH125N	RNCH125S	RNCH125NF	RNCH125SF
SPECIFICATIONS	Performance (standard NFPA Conditions)	Flow @ 25 PSI (1.7 BAR)	68 GPM (257 lpm)						
		Flow @ 50 PSI (3.4 BAR)	42 GPM (159 lpm)						
		Flow @ 75 PSI (5.2 BAR)	12 GPM (45 lpm)						
		Maximum Pressure	85 PSI (5.9 BAR)						
		Maximum Flow	80 GPM (303 lpm)						
	Pump Type	High Pressure	1-Stage Centrifugal Pump						
	Engine Type	Air Cooled Engine	Honda GXH50						
	Engine Max Power	[Torque]	2.1 HP (1.6 kW) @ 7,000 RPM [2.0 lb-ft (2.7 Nm) @ 4,500 RPM]						
	Base		Copolymer polypropylene base with rails and cut-outs						
	Dimensions	L x W x H	42.5" x 44" x 28"						
Dry Weight*		159 lbs (72 kg)							
Wet Weight*		702 lbs (318 kg)							

* Approximated and varies based off option selections

OPTIONS	Discharge & Oveboard Suction Threads	1-1/2" NH	S	—	S	—	S	—	S	—
		1-1/2" NPSH	—	S	—	S	—	S	—	S
	Foam Eductor	Scotty	—	—	S	S	—	—	S	S

Standard s
 Option o
 Not Applicable —